



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

Bescheinigung

Certificate

Attestation

REC'D 06 AUG 2003

PCT

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02019542.6

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

BEST AVAILABLE COPY



Anmeldung Nr:

Application no.: 02019542.6

Demande no:

Anmeldetag:

Date of filing: 30.08.02

Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Max-Planck-Gesellschaft zur Förderung
der Wissenschaften e.V.
Hofgartenstrasse 8
80539 München
ALLEMAGNE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:

(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung..

If no title is shown please refer to the description.

Si aucun titre n'est indiqué se referer à la description.)

Ceramic pigments on apatite basis

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)
revendiquée(s)

Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

EP/28.06.02/EP 02014451

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

C09C/

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

30. Aug. 2002

WEICKMANN & WEICKMANN

Patentanwälte
European Patent Attorneys · European Trademark Attorneys

EPO - Munich
66
30. Aug. 2002

Unser Zeichen:
27997P EP-1/MDmhei

Anmelder:
Max-Planck-Gesellschaft zur
Förderung der Wissenschaften e.V.
Hofgartenstraße 8

80539 München

DIPL.-ING. H. WEICKMANN (bis 31.1.01)
DIPL.-ING. F. A. WEICKMANN
DIPL.-CHEM. B. HUBER
DR.-ING. H. LISKA
DIPL.-PHYS. DR. J. PRECHTEL
DIPL.-CHEM. DR. B. BÖHM
DIPL.-CHEM. DR. W. WEISS
DIPL.-PHYS. DR. J. TIESMEYER
DIPL.-PHYS. DR. M. HERZOG
DIPL.-PHYS. B. RUTTENSBERGER
DIPL.-PHYS. DR.-ING. V. JORDAN
DIPL.-CHEM. DR. M. DEY
DIPL.-FORSTW. DR. J. LACHNIT

Ceramic pigments on apatite basis

Description

5

The present invention relates to compounds on apatite basis, processes for the preparation thereof as well as applications of these compounds. The compounds presented herein are particularly useful as pigments.

10 Ceramic pigments are widely used to impart color and / or opacity to artificial articles and are usually incorporated as fine particles in paints, plastics, and other materials. Although many chemical compounds are effectively applied as pigments there is still a need to find new compounds and mixtures which show bright colors and are relatively cheap, stable
15 towards heating and light, chemically compatible with the materials, non-toxic and environment friendly.

A compound with approximate composition $\text{Sr}_5(\text{VO}_4)_3(\text{CuO})$ (1) has been synthesized and structurally characterized by W.Carrillo-Cabrera, H.G. von
20 Schnering, Z. anorg. Allg. Chem. 1999, 625, 183. However the compound was colorless and contained copper in oxidation state +1 only. In the same paper an isostructural compound $(\text{Sr}_{0.9}\text{Ca}_{0.1})_5(\text{Cr}^{\text{V}}\text{O}_4)_3(\text{Cu}^{\text{I}}\text{O})$ is mentioned, the data for it being unpublished. A copper containing strontium vanadate has been described earlier by P.E.Kazin, M.A.Uskova,
25 Yu.D.Tretyakov, M.Jansen, S.Scheurell, E.Kemnitz, Physica C 1998, 301, 185. But only the metal element ratio and the unindexed powder diffraction pattern have been reported then. So far, copper has been introduced in the phosphate apatites only in M position. The solid solution $(\text{M}_{1-x}\text{Cu}_x)_5(\text{PO}_4)_3\text{OH}$, where M = Sr, Ca, as well as the fully substituted
30 compound $\text{Cu}_5(\text{PO}_4)_3\text{OH}$ have been reported by M. Pujari, P.N.Patel, J. Solid State Chem. 1989, 83, 100. Besides, the phosphor $\text{Sr}_5(\text{PO}_4)_3\text{Cl}$ doped

by small amount of Cu as activator is known (Hunt, McKeag, J. Electrochem. Soc. 1959, 106, 1032).

Therefore, it was an object of the invention to provide new compounds on apatite basis, especially compounds which are brightly colored.

According to the invention this object is achieved by providing a compound having the general formula (I)



wherein the group $M_5(AO_4)_3$ forms an apatite structure and X is situated in the hexagonal channels of the apatite structure and includes Cu-atoms, with the proviso that the compound is not $Sr_5(VO_4)_3(CuO)$, $Sr_5(VO_4)_3(Cu_{0.894}O_{0.952})$, or $(Sr_{0.9}Ca_{0.1})_5(Cr^VO_4)_3(CuO)$.

In particular, the invention relates to new chemical compounds, processes of their preparations and applications. The compounds have apatite based structures with general composition $M_5(AO_4)_3X$ where M and A are different individual chemical elements or mixtures of elements appropriate to form the apatite structure.

In a preferred embodiment A represents P, V or a mixture thereof and M represents Ba, Sr, Ca or a mixture thereof. X represents different atoms in different quantity, situated in the hexagonal channels. Essential feature of the compounds is the presence of Cu, in particular, of Cu ions in the channels. Most preferably, the Cu ions form O-Cu-O linear units.

The compounds of the invention, in particular, compounds having Cu^{2+} in an unusual two-fold coordination, are brightly colored from dark-blue through blue-violet to red-violet. The color shade can be regulated by using different M and A elements, the brightness can be increased or decreased by oxidizing or reducing the copper ions via annealing in atmosphere with different partial oxygen pressure. The compounds are stable in ambient

conditions and toward heating above 1000 °C in air. The compounds with certain M, A and X are relatively cheap, non-toxic and environment friendly. The compounds are preferably applied as pigments for plastics, paints, cements and plasters.

5 The group X preferably has a charge of -1 and formally represents a certain fraction of Cu^{2+} , and/or Cu^+ , and O^{2-} ions mixed with anions such as OH^- , F^- , Cl^- , Br^- . Most preferably, X represents $\text{Cu}_x\text{O}_y\text{H}_z$, wherein $0 < x \leq 0.85$, $0 \leq z < 1$ and $0.5 < y \leq 1$. More preferably, X represents $\text{Cu}_x\text{O}_y\text{H}_z$,
10 wherein $0.1 \leq x \leq 0.6$, in particular, $0.2 \leq x \leq 0.5$.

Several samples of compounds of the invention were characterized by X-ray single crystal and powder diffraction, ICP-OES analysis, scanning electron microscopy with EDX analysis, IR and NMR spectroscopy,
15 magnetic measurements, UV-VIS spectrometry (diffuse reflectance spectra).

In preferred embodiments the main new features of the compounds claimed in the invention are: (i) copper(II) exists in the hexagonal channels
20 of the apatite structure and provides the bright color of the samples; or/and (ii) copper ions are present in the hexagonal channels of phosphate apatites and other compounds with apatite structure; or/and (iii) copper atoms as oxocuprate ions form a continuous solid solution in the hexagonal channels, optionally together with other anions. Essentially unexpected is the
25 incorporation of copper-oxygen units in the place of hydroxyls in the well known phosphate apatites, as well as the presence of divalent copper in the channels in twofold coordination by oxygen atoms. According to (ii) copper ions in an oxidation state of +1, +2 or both, are in the channels of apatites. Examples of apatites are phosphate apatites as well as vanadate
30 apatites. By selecting appropriate elements for A also apatite structures based on SiO_4^{2-} , SiO_4^{4-} and AsO_4^{3-} can be prepared.

It has been reported that in channels of the particular apatite $\text{Sr}_5(\text{VO}_4)_3\text{CuO}$ long, ideally infinite, linear chains of $\text{Cu}_n\text{O}_{n+1}^{(n+2)-}$ are present. According to (iii) above Cu-O^- units can be continuously substituted by anions present in apatites such as OH^- , F^- or Cl^- so that the long $[\text{CuO}]_n^{n-}$ chains are broken
5 into short entities such as monomeric O-Cu-O^{3-} , O-Cu-O^{2-} , HO-Cu-O^{2-} or oligomeric $\text{O-(Cu-O)}_n\text{-Cu-O}$, wherein n is an integer from 1 to 10, preferably from 1 to 5, and more preferably from 1 to 3.

Compounds containing Cu^{2+} and, in particular, compounds containing Cu^{2+}
10 as well as Cu^+ are brightly colored. They can be used, in particular, as pigments, e.g. as ceramic pigments.

Further, the compounds of the invention, in particular, compounds having only Cu^+ and no Cu^{2+} in group X preferably can be used as intermediates.
15 From these compounds colored substances can be obtained, e.g. by oxidation. To impart color or to enhance color it is often sufficient to oxidize only a small part of Cu(I) to Cu(II) .

The compounds according to the invention can easily be prepared by
20 mixing compounds comprising the elements M, A and X and thermally treating the mixture in a range of from 200 to 1700°C to yield a compound of general formula (I). The starting compounds preferably are employed in a ratio close to the desired stoichiometric ratio. The thermal treatment preferably takes place at 400 to 1500°C, more preferably from
25 700 to 1400°C. The thermal treatment can be performed for 0.01 to 60 h, more preferably from 0.1 to 30 h, and most preferably from 1 to 10 h. To enhance the yield of the desired compounds the thermal treatment can be performed with intermediate regrinding. Depending on the amount of Cu^{2+} desired, the thermal treatment can be performed in an oxygen-containing
30 atmosphere such as air or oxygen or in an oxygen-free atmosphere such as under argon, nitrogen or another protective gas. To enhance the amount of Cu^{2+} present in the hexagonal channels of the apatite, an additional step

can be performed comprising a thermal treatment of the compound in oxygen, inert gas atmosphere or vacuum at 500 to 900°C, preferably from 600 to 800°C for 0.5 to 24 h, preferably from 2 to 12 h.

5 In a most preferred embodiment the process according to the invention comprises the steps:

- (i) mixing of carbonates of M, $(\text{NH}_4)\text{H}_2\text{PO}_4$ and Cu compounds,
- (ii) thermal treatment of this mixture in solid state in air at 600 to 850°C for 1 to 5 h,
- 10 (iii) regrinding,
- (iv) thermal treatment at 1100 to 1400°C for about 1 to 24 h,
- (v) cooling, and
- (vi) regrinding.

15 The compounds $\text{M}_5(\text{AO}_4)_3\text{X}$ preferably can be prepared from mixtures of salts and oxides containing the required components in close to stoichiometric ratio by solid state reaction at about 700 - 1400 °C, or by melting and solidification at about 1000 - 1700 °C. The samples prepared in air contain simultaneously Cu^+ and Cu^{2+} ions. Depending on the copper

20 content and thermal treatment conditions separate linear O-Cu-O or/and condensed (-)O-Cu-O-Cu-O(-) units form in the hexagonal channels. The copper can be further oxidized by annealing in oxygen atmosphere or reduced by annealing in argon atmosphere or vacuum with a Cu_2O - CuO getter.

25

In particular, samples containing Cu^{2+} exhibit an unexpectedly bright color for copper ions. The absorption spectra show overlapping bands in the visible region. They can be related to d-d electron transitions in linear O-Cu(II)-O units. The latter appear to be the first example of twofold

30 coordinated divalent copper in the solid state. The color is changing from dark-blue for $\text{Ba}_5(\text{PO}_4)_3\text{Cu}_x\text{OH}_2$ through blue-violet for $\text{Sr}_5(\text{PO}_4)_3\text{Cu}_x\text{OH}_2$ till red-violet for $\text{Ca}_5(\text{PO}_4)_3\text{Cu}_x\text{OH}_2$. The brightest color is attained for x about

0.1 - 0.4. The color intensity is further increased by annealing the samples in oxygen at 600 - 800 °C.

5 The compounds of the invention preferably are stable in air at ambient conditions, insoluble in water, and resistant to heating up to 1000 °C. Compounds with $M = \text{Sr}, \text{Ca}$, $A = \text{P}$, and $X = \text{Cu}_x\text{OH}_y$ are non-toxic. Among them, the compounds with $M = \text{Ca}$ are very cheap and environment friendly, as they represent simply hydroxylapatite modified by inserting small amounts of copper into the hexagonal channels. Further, the
10 compounds of the invention are stable in alkaline media due to the basic nature of hydroxylapatites.

The invention further relates to a pigment comprising a compound of the invention, in particular, a compound of general formula (I), wherein X
15 comprises Cu^{2+} , more preferably, wherein X comprises Cu^{2+} as well as Cu^+ .

The compounds of the invention can be used as intermediates for preparation of colors as well as colored materials themselves. Therefore,
20 they can be used, e.g. as pigments, paint or as coloring additives, e.g. in cements or plasters.

The following Figures and Examples illustrate this invention.

25 Fig.1 shows diffuse reflectance spectra of the samples of Example 1. $\text{Sr}_5(\text{PO}_4)_3\text{Cu}_x\text{OH}_y$; as prepared: A1, $x = 0.1$, A3, $x = 0.3$, A5, $x = 0.5$; annealed in oxygen at 800 °C: D1, $x = 0.1$, D3, $x = 0.3$.

30 Fig.2 shows diffuse reflectance spectra of the samples of Example 4 and Example 5, $\text{M}_5(\text{PO}_4)_3\text{Cu}_{0.3}\text{OH}_y$.

Example 1.

Preparation of $\text{Sr}_5(\text{PO}_4)_3\text{Cu}_x\text{OH}_y$, about 1 - 5 g.

5 SrCO_3 , $\text{NH}_4\text{H}_2\text{PO}_4$ and CuO (all of 99,99%) were thoroughly ground and mixed in an agate mortar in a 5.05 : 3 : x molar ratio, where $x = 0.01$, 0.1, 0.2, 0.3, 0.4, 0.5, 0.6. The mixtures were heated stepwise at 600 and 850 °C for 32 h with intermediate regrindings. The powders were pressed in pellets, annealed in air at 1100°C for 24 hours and
10 air-quenched. The pellets were ground in an agate mortar to obtain fine powders.

X-ray diffraction patterns correspond to almost single phase apatite (about 97% for $x = 0.01$ and >99% for the other x). Rietveld structure
15 refinement have confirmed the copper to be situated in the hexagonal channels. Infrared spectra testify presence of OH groups with very weak hydrogen bonds. The samples are blue-violet in color, deepening with increasing x. The diffuse reflectance spectra are shown in Fig.1. Two overlapping lines are observed in the visible region. The samples with $x =$
20 0.1 and 0.3 were further annealed in oxygen flow at 800 °C for 2 hours. By this treatment, the intensity of the absorption lines has been increased.

Example 2.

25 Preparation of $\text{Sr}_5(\text{PO}_4)_3\text{Cu}_{0.3}\text{OH}_y$, 5 kg.

20 moles rough crystalline $\text{NH}_4\text{H}_2\text{PO}_4$ and 33.67 moles SrCO_3 were thoroughly ground and mixed for 1 hour in a mill. A water solution of 2 moles $\text{Cu}(\text{NO}_3)_2 \cdot 2.5\text{H}_2\text{O}$ was added and the components were mixed for 1
30 hour again. The mixture was annealed stepwise at 600 °C and 1200 °C for total time of about 36 hours with an intermediate regrinding and air quenched.

The powder obtained is bright blue-violet in color.

Example 3.

5 Preparation of $\text{Sr}_5(\text{PO}_4)_3\text{Cu}_{1/3}\text{O}_{2/3}$, about 1 g.

The sample (about 0.5 g) with $x = 1$ prepared as in Example 1 was arc-melted on a copper plate in air at about 1700 °C for about 1-2 minutes and air quenched. The sample is blue-violet in color and contains > 98% of
10 apatite phase.

Example 4.

Preparation of $\text{M}_5(\text{PO}_4)_3\text{Cu}_{0.3}\text{OH}_y$, where M is Ca or Ba, about 1 - 5 g.

15

MCO_3 , $\text{NH}_4\text{H}_2\text{PO}_4$ and CuO (all of 99,99%) were thoroughly ground and mixed in an agate mortar in a 5.05 : 3 : 0.3 molar ratio. The mixtures were annealed stepwise at 600, 850 °C and 1100 °C for total time of about 60 - 80 hours with intermediate regrindings and air quenched.

20

The sample with Ca is red-violet in color, and the one with Ba is dark-blue. The corresponding diffuse reflectance spectra are shown in Fig.2.

Example 5.

25

Preparation of $\text{Sr}_{2.5}\text{M}'_{2.5}(\text{PO}_4)_3\text{Cu}_{0.3}\text{OH}_y$.

The same preparation procedure as in Example 4 but instead of MCO_3 an equimolar mixture of SrCO_3 and $\text{M}'\text{CO}_3$ was used.

30

The samples have intermediate colors between these of the samples of Example 2 and Example 4. The diffuse reflectance spectrum of the sample with $M' = \text{Ca}$ is shown in Fig.2.

5 Example 6.

Preparation of $M_5(\text{VO}_4)_3\text{Cu}_{0.3}\text{O}_{1-z}\text{H}_y$, where M is Sr or Ca.

10 The same preparation procedure as in Example 4, but $1/2 \text{ V}_2\text{O}_5$ was taken instead of $\text{NH}_4\text{H}_2\text{PO}_4$.

As obtained apatite phases have gray-blue-violet ($M = \text{Sr}$) or light-gray-green ($M = \text{Ca}$) colors.

15 Example 7.

Preparation of $M_5(\text{PO}_4)_3\text{Cu}_x(\text{O},\text{X})_y\text{H}_z$
, where M is Ca or Sr, X is F or Cl.

20 The same preparation procedure as in Example 4, but 0.2 - 0.7 mol of NH_4X was added to the initial mixture.

The samples show colors ranging from pink to blue-violet.

25 Example 8.

Preparation of $\text{Sr}_5(\text{PO}_4)_3\text{Cu}_{0.3}\text{OH}_y$, ca. 250 g.

30 1 mole $\text{NH}_4\text{H}_2\text{PO}_4$ and 1.68 mole SrCO_3 were thoroughly ground and mixed for 1 hour in a mill. A water solution of 0.1 mole $\text{Cu}(\text{NO}_3)_2 \cdot 2.5\text{H}_2\text{O}$ was added and the components were mixed for 1 hour again. The mixture was annealed stepwise at 600 °C and 1100 °C for total time of about 24 hours

annealed stepwise at 600 °C and 1100 °C for total time of about 24 hours in a rotary kiln (Al_2O_3 tube, $d_i = 12$ cm, $l = 50$ cm, rotation speed 1 min^{-1}) and reground after cooling.

- 5 The powder obtained is bright blue-violet in color.

Claims

1. A compound having the general formula (I)
5 $M_5(AO_4)_3X$,
wherein the group $M_5(AO_4)_3$ forms an apatite structure and X is situated in the hexagonal channels of the apatite structure and includes Cu-atoms, with the proviso that the compound is not $Sr_5(VO_4)_3(CuO)$, $Sr_5(VO_4)_3(Cu_{0.894}O_{0.952})$, or $(Sr_{0.9}Ca_{0.1})_5(Cr^VO_4)_3(CuO)$.
- 10 2. The compound according to claim 1, wherein A represents P, V or a mixture thereof and M represents Ba, Sr, Ca or a mixture thereof.
3. The compound of claim 1, wherein X represents a mixture of Cu^{2+} ,
15 Cu^+ , O^{2-} , OH^- , F^- , Cl^- , Br^- and/or I^- .
4. The compound of claim 1, wherein X comprises copper ions.
5. The compound according to any of the preceding claims, wherein X
20 comprises Cu^{2+} .
6. The compound according to any of the preceding claims, wherein linear units O-Cu-O are present in the hexagonal channels of the apatite structure.
- 25 7. The compound according to any of the preceding claims, wherein X represents $Cu_xO_yH_z$, wherein $0 < x \leq 0.85$, $0 \leq z < 1$ and $0.5 < y \leq 1$.
8. The compound according to any of the preceding claims, wherein
30 $0.1 \leq x \leq 0.6$.

9. The compound according to any of the preceding claims, wherein A represents P.

10. A process for preparing a compound according to any of claims 1-9 comprising the steps:

- (i) mixing of compounds comprising the elements M, A and X,
- (ii) thermal treatment of the mixture in the range of 200 to 1700°C to yield a compound of the general formula (I).

11. The process according to claim 10, wherein the thermal treatment is performed for 0.01 to 60 hours.

12. The process according to claim 10 or 11, wherein the thermal treatment is performed with intermediate regrinding.

13. The process according to any of claims 10 to 12, wherein the thermal treatment of the mixture is performed in air, argon or oxygen.

14. The process according to any of claims 10 to 13, further comprising the step

- (iii) thermal treatment of the compound obtained in step (ii) in oxygen, inert gas atmosphere or vacuum at 500 to 900°C for 0.5 to 24 hours.

15. The process according to any of claims 6 to 12 comprising the steps

- (i) mixing of carbonates of M, $(\text{NH}_4)\text{H}_2\text{PO}_4$ and Cu-compounds,
- (ii) thermal treatment of this mixture in solid state in air at 600 to 850°C for 1 to 5 hours,
- (iii) regrinding,
- (iv) thermal treatment at 1100 to 1400°C for about 1 to 24 hours,

(v) cooling and

(vi) regrinding.

16. Pigment comprising a compound to any of claims 1 to 9.

5

17. Pigment according to claim 15, wherein X in the compound of general formula (I) comprises Cu^{2+} .

10

18. Use of a compound according to any of claims 1 to 7 as pigment, paint or as coloring additive in cements or plasters.

30. Aug. 2002

- 14 -

EPO - Munich
66
30. Aug. 2002

Abstract

5 The present invention relates to compounds on apatite basis, processes for
the preparation thereof as well as applications of these compounds. The
compounds presented herein are particularly useful as pigments.

10 ei 30.06.2002

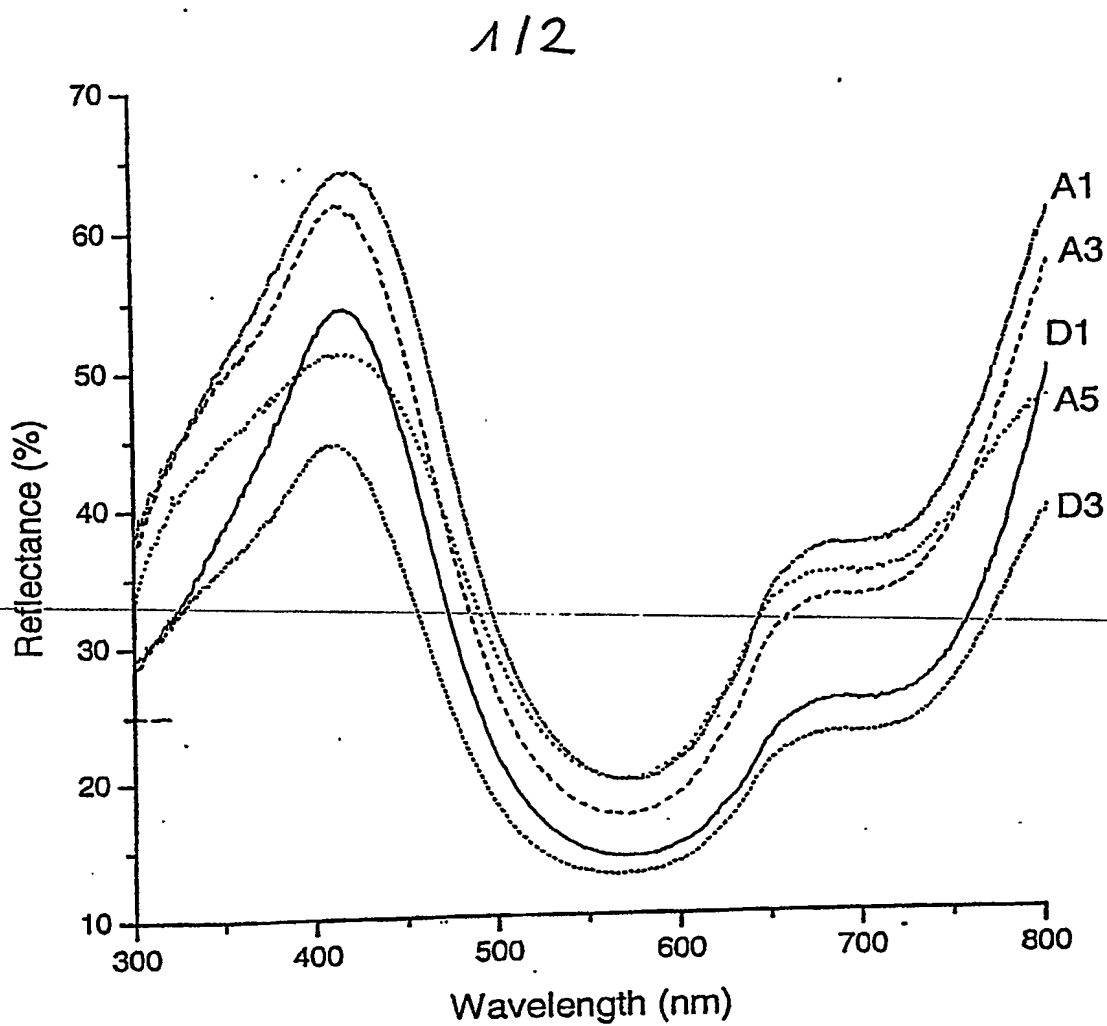


Fig. 1.

212

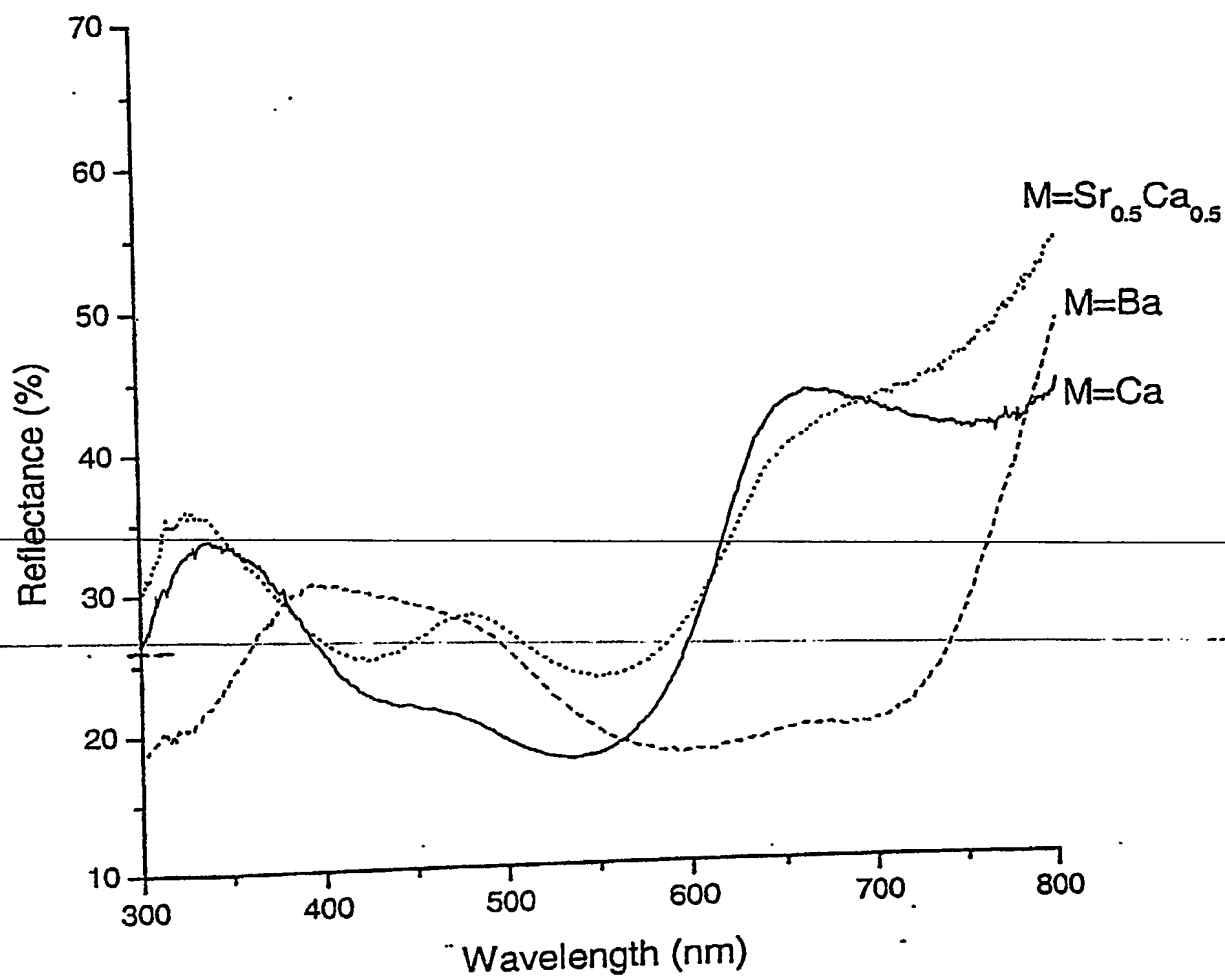


Fig.2.

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.